



SILENTBLOCS / Plots


Caractéristiques techniques / Dimensions (en mm)

Exemple de désignation :

B 40 40

Type - Diamètre x Hauteur

Plots cylindriques

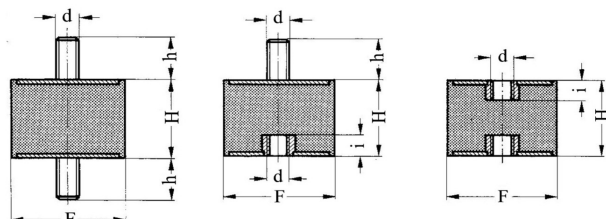


Type A

Type B

Type C

Plots diabolos

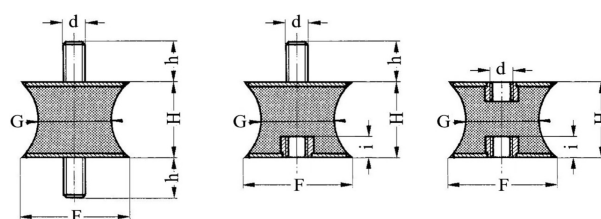

Type DA


Type DB

Type DC

TYPE	F	d	H	h	i	Compression		Cisaillement	
						Charge daN	Flèche mm	Charge daN	Flèche mm
A - -	12,5	M5	10	10	-	21	2	1,5	1,5
A - -			15			10	3	1,5	2
A - -			20			8	3,5	1,5	4
A B C	16	M5	10	12	3	20	1,5	2,5	1,5
A B C			15			20	3	2,5	2
A B C			20			15	4	2,5	4
A B C	20	M6	15	16,5	4	35	3	5	2,5
A B C			20			30	4,5	5	3,5
A B C			25			30	5,5	4,5	4,5
A B C	25	M8	10	20	6	80	1,5	8	1,5
A - -			15			60	2,5	8	2,5
A - -			22			50	4	8	4
A B C	30	M8	15	20	6	50	5,5	8	4,5
A B C			25			50	7,5	8	6
A B C			40			50	10	10	6
A B -	40	M10	15	20	6	90	3	11	2,5
A B C			22			80	5	11	4
A B C			30			70	8	11	6
A B C	50	M10	15	25	8	60	9	11	7,5
A B -			20			160	4	20	3
A B C			28			150	6	20	5,5
A B C	60	M10	35	25	8	120	8	20	6,5
A B C			40			120	10	20	7,5
A B C			45			120	11	20	9
A - -	70	M10	25	25	8	300	6	25	4,5
A B C			35			250	8	25	7
A B C			45			190	11	25	9
A - -	80	M14	25	35	12	400	5	30	4,5
A B C			36			300	8	30	7
A B C			45			250	11	30	9
A B C	100	M10	35	25	9	450	8	35	6,5
A B C			50			350	11	35	11
A B C			70			300	14	35	15
A - -	120	M14	30	35	12	950	7	40	5
A B C			40			600	9	40	7
A B C			70			500	17	40	15
A B C	150	M14	80	35	12	450	19	40	17

TYPE	F	G	d	H	h	i	Compression		Cisaillement	
							Charge daN	Flèche mm	Charge daN	Flèche mm
DA DB DC	12	8	M5	12	10	3	4	1,5	0,4	1,5
DA DB DC	20	13,5	M6	19	16,5	4	12	2,5	3	5
DA DB DC	30	24	M8	25	20	6	40	5	4	4,5
DA DB DC	40	19	M8	28	25	6	30	5	2,5	4,5
DA DB DC		19	M10	28	25	8	30	5	2,5	4,5
DA DB DC		26	M8	30	25	6	45	3	4	4,5
DA DB DC	44	25	M8	42	25	6	50	6	9	6
DA DB DC	60	24	M8	44	20	6	40	5	7	5
DA DB DC		34	M8	44	20	6	75	5	12	6
DA DB DC		34	M10	44	20	8	75	5	12	6
DA DB DC	80	50	M10	60	25	8	150	8	30	10
DA DB DC		37	M10	36	25	8	100	7	20	8
DA DB DC		70	M14	70	35	12	300	9	55	9,8
DA DB DC	95	80	M16	76	45	14	400	9,5	70	8

Supports Anti vibratoires

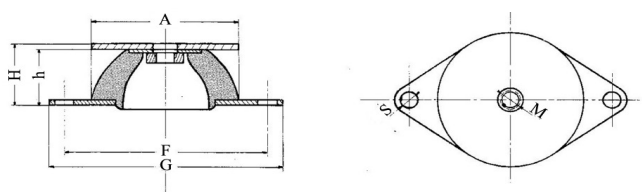

Type SAV

Type	A	F	G	H	h	M	S	Masse Kg	Dureté Shore	Charge daN	Flèche mm
SAV4045	40	52	65	20	18	M6	6,2	0,05	45	5	2,5
SAV4060									60	10	2,5
SAV6045	60	76	90	24	22	M6	6,2	0,14	45	15	3,5
SAV6060									60	25	3,5
SAV6075									75	50	3,5
SAV8045	80	100	120	27	25	M8	8,2	0,25	45	40	4,5
SAV8060									60	80	4,5
SAV8075									75	120	4,5
SAV10045	100	124	150	28	25	M10	10,2	0,42	45	75	4,5
SAV10060									60	160	4,5
SAV10075									75	220	4,5
SAV15045	150	182	215	39	35	M14	21,2	1,34	45	130	7
SAV15060									60	300	7
SAV15075									75	400	7
SAV20045	200	240	280	44	40	M18	14,5	3,03	45	500	8
SAV20060									60	850	8
SAV20075									75	1300	8


Composition

Caoutchouc naturel 45 Shore adhésié à 1 ou 2 armatures métalliques

Température maximum d'utilisation : 70 °C

Ne doit pas travailler en traction

Exemples de montage

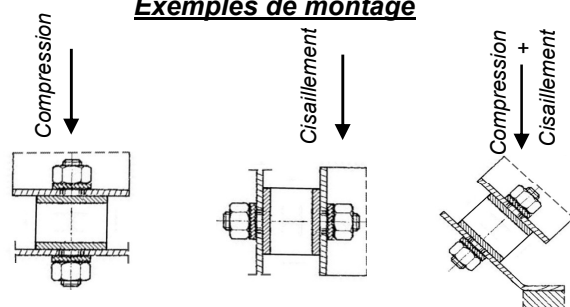

Exemples de montage

