




POULIES pour courroies type SPA/A - XPA/AX

Caractéristiques techniques / Dimensions (en mm)


Exemple de désignation :

2 SPA 90 (TL1610)


Nbre gorges - Section - Ø primitif - Moyeu




Type 1




Type 2




Type 3




Type 4




Type 5



Type 6




Type 7




Type 8

DP	DE	Gorges	Ref. Moyeu	Type	B	L	Masse Kg
67	73	1	1108	1	20	22	0,28
		2	1108	6	35	22	0,38
71	77	1	1108	1	20	22	0,35
		2	1108	6	35	22	0,44
		3	1108	6	50	22	0,62
75	81	1	1108	1	20	22	0,4
		2	1108	6	35	22	0,52
		3	1108	6	50	22	0,65
80	86	1	1210	1	20	25	0,53
		2	1210	6	35	25	0,74
		3	1210	6	50	25	0,82
85	91	1	1210	1	20	25	0,6
		2	1210	6	35	25	0,81
		3	1210	6	50	25	0,9
90	96	1	1210	1	20	25	0,8
		2	1610	6	35	25	0,9
		3	1610	6	50	25	1
		4	1615	6	65	38	1,3
95	101	1	1210	1	20	25	0,8
		2	1610	6	35	25	0,9
		3	1610	6	50	25	1,3
		4	1615	6	65	38	1,7
100	106	1	1610	1	20	25	0,9
		2	1610	6	35	25	1
		3	1610	2	50	25	1,4
		4	1615	2	65	38	1,8
		5	1615	2	80	38	2,09
106	112	1	1610	1	20	25	0,9
		2	1610	6	35	25	1,2
		3	1610	2	50	25	1,6
		4	2012	6	65	32	1,7
		5	2012	8	80	32	2,17
112	118	1	1610	1	20	25	1
		2	1610	6	35	25	1,4
		3	2012	6	50	32	1,6
		4	2012	6	65	32	2
		5	2012	8	80	32	2,27
118	124	1	1610	1	20	25	1,1
		2	1610	6	35	25	1,6
		3	2012	2	50	32	1,9
		4	2012	2	65	32	2,3
		5	2012	2	80	32	2,57
125	131	1	1610	1	20	25	1,3
		2	1610	6	35	25	1,9
		3	2012	2	50	32	2,3
		4	2012	2	65	32	2,7
		5	2012	3	80	32	3,2
132	138	1	1610	1	20	25	1,5
		2	2012	6	35	32	2,2
		3	2012	2	50	32	2,6
		4	2517	2	65	45	2,8
		5	2517	3	80	45	3,4

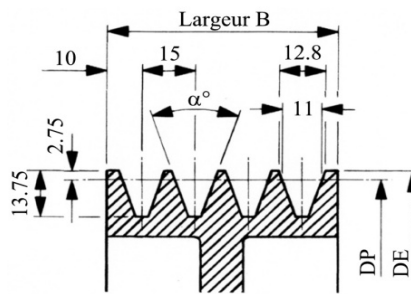

Gorges	1	2	1	4	5
B	20	35	50	65	80

α	DP
34	67 à 118
38	125 à 800



DP	DE	Gorges	Ref. Moyeu	Type	B	L	Masse Kg
140	146	1	1610	1	20	25	1,8
		2	2012	6	35	32	2,6
		3	2517	6	50	45	2,9
		4	2517	2	65	45	3,6
		5	2517	3	80	45	4
150	156	1	1610	1	20	25	1,9
		2	2012	6	35	32	3,2
		3	2517	6	50	45	3,6
		4	2517	2	65	45	4,2
		5	2517	3	80	45	4,8
160	166	1	1610	1	20	25	2,2
		2	2012	6	35	32	3,2
		3	2517	6	50	45	3,8
		4	2517	2	65	45	4,4
		5	2517	3	80	45	4,9
180	186	1	1610	1	20	25	2,1
		2	2012	7	35	32	5,2
		3	2517	6	50	45	6,1
		4	2517	2	65	45	6,8
		5	3020	3	80	51	7
200	206	1	2012	1	20	32	2,8
		2	2517	8	35	45	4,7
		3	2517	7	50	45	5,5
		4	3020	2	65	51	8,5
		5	3020	3	80	51	9,4

DP	DE	Gorges	Ref. Moyeu	Type	B	L	Masse Kg
224	230	1	2012	1	20	32	3,2
		2	2517	8	35	45	5,3
		3	2517	7	50	45	6,2
		4	3020	2	65	51	11,5
250	256	2	3020	2	80	51	12,5
		1	2012	1	20	32	3,7
		2	2517	8	35	45	5,8
		3	2517	7	50	45	6,8
280	286	4	3020	7	65	51	9,5
		5	3020	7	80	51	10,5
		1	2012	1	20	32	4
		2	2517	8	35	45	6,5
315	321	3	2517	7	50	45	7,6
		4	3020	7	65	51	10,5
		5	3535	8	80	89	17
		1	2012	1	20	32	4,6
355	361	2	2517	8	35	45	7,6
		3	3020	4	50	51	11
		4	3020	4	65	51	12
		5	3535	5	80	89	20
400	406	1	2012	1	20	32	5,6
		2	2517	4	35	45	5,9
		3	3020	4	50	51	12
		4	3020	4	65	51	13
450	456	5	3535	5	80	89	20
		1	2012	1	20	32	6,5
		2	2517	4	35	45	10
		3	3020	4	50	51	13
450	456	4	3020	4	65	51	14,5
		5	3535	5	80	89	21,5
450	456	1	2012	1	20	32	10
		2	2517	4	35	45	11,5
		3	3020	4	50	51	14,5
		4	3020	4	65	51	16,5
500	506	5	3535	5	80	89	23
		1	2517	1	20	45	11,5
		2	2517	4	35	45	12,5
		3	3020	4	50	51	15,5
560	566	4	3020	4	65	51	18
		2	3020	4	35	51	15
		3	3020	4	50	51	16
		4	3535	4	65	89	23,5
630	636	5	3535	5	80	89	27
		2	3020	4	35	51	18
		3	3020	4	50	51	20
		4	3535	4	65	89	28
800	806	5	3535	5	80	89	31
		3	3535	4	50	89	42
		4	3535	4	65	89	55
		5	4040	5	80	102	64