




POULIES pour courroies type SPB/B - XPB/BX

Caractéristiques techniques / Dimensions (en mm)


Exemple de désignation :

4 SPB 400 (TL3535)

Nbre gorges - Section - Ø primitif - Moyeu


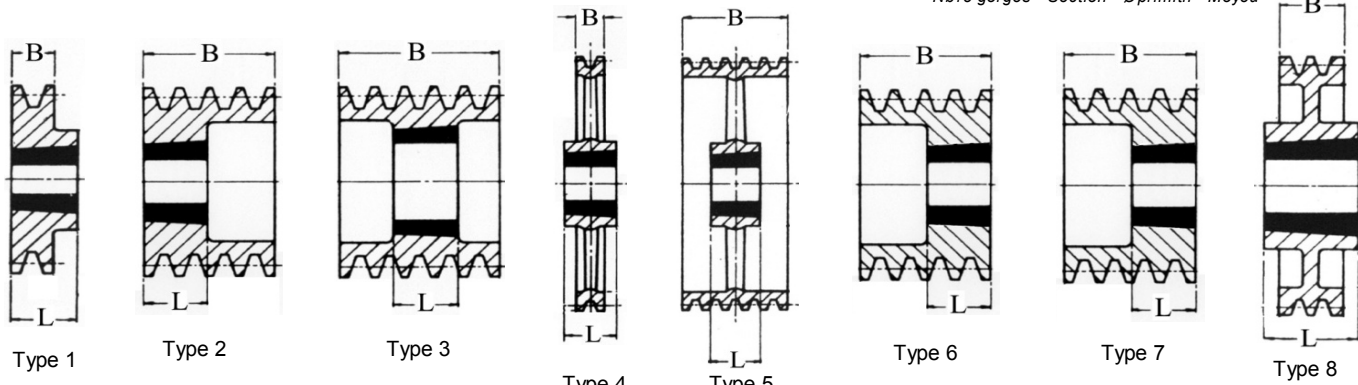


DP	DE	Gorges	Ref. Moyeu	Type	B	L	Masse Kg
100	107	1	1610	1	25	25	0,9
		2	1610	7	44	25	1,2
		3	1610	6	63	25	1,7
106	113	1	1610	1	25	25	1
		2	1610	7	44	25	1,4
		3	1610	6	63	25	1,9
112	119	1	1610	1	25	25	1,1
		2	1610	7	44	25	1,5
		3	1610	6	63	25	2
118	125	1	1610	1	25	25	1,3
		2	1610	2	44	25	1,7
		3	1610	2	63	25	2,3
125	132	1	1610	1	25	25	1,5
		2	2012	2	44	32	2
		3	2012	2	63	32	2,7
		4	2012	3	82	32	3,3
		5	2012	6	101	32	3,5
132	139	1	1610	1	25	25	1,8
		2	2012	2	44	32	2
		3	2012	2	63	32	3
		4	2012	3	82	32	3,7
		5	2517	6	101	45	3,7
140	147	1	1610	1	25	25	2
		2	2012	2	44	32	2,7
		3	2012	2	63	32	3,5
		4	2517	3	82	45	4
		5	2517	3	101	45	4,8
		6	2517	3	120	45	5,5
150	157	1	1610	1	25	25	2,5
		2	2012	2	44	32	3,3
		3	2517	2	63	45	4,1
		4	2517	3	82	45	4,9
		5	2517	3	101	45	5,7
		6	2517		120	45	6,5
160	167	1	1610	1	25	25	2,8
		2	2012	2	44	32	6,9
		3	2517	2	63	45	4,8
		4	2517	3	82	45	5,7
		5	2517	3	101	45	6,6
		6	3020	3	120	51	6,5
180	187	1	1610	1	25	25	3,7
		2	2517	1	44	45	5,5
		3	2517	2	63	45	6,6
		4	2517	3	82	45	7,7
		5	3020	3	101	51	7,9
		6	3020	3	120	51	8,9
200	207	1	2012	1	25	32	4,1
		2	2517	1	44	45	7,5
		3	2517	2	63	45	8,6
		4	3020	3	82	51	9,3
		5	3020	3	101	51	10,5
		6	3020	3	120	51	11,7
		8	3535	3	158	89	14,5

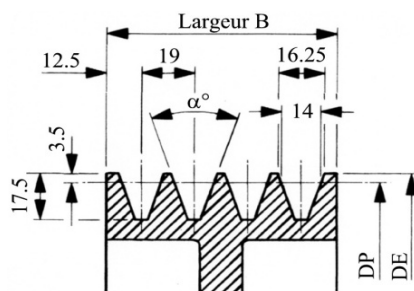

Gorges	1	2	1	4	5	6	8
B	25	44	63	82	101	120	158

α	DP
34	100 à 180
38	200 à 1250



DP	DE	Gorges	Ref. Moyeu	Type	B	L	Masse Kg
224	231	1	2012	1	25	32	4,6
		2	2517	7	44	45	6,6
		3	2517	7	63	45	8,1
		4	3020	3	82	51	12,3
		5	3020	3	101	51	13,8
		6	3535	3	120	89	17,8
		8	3535	3	158	89	20
250	257	1	2012	1	25	32	5,6
		2	2517	7	44	45	7,7
		3	3020	7	63	51	11
		4	3020	7	82	51	12,5
		5	3535	3	101	89	22,5
		6	3535	3	120	89	24,5
		8	3535	3	158	89	27
280	287	1	2012	1	25	32	8,5
		2	2517	7	44	45	9,5
		3	3020	7	63	51	13
		4	3020	7	82	51	15
		5	3535	7	101	89	21
		6	3535	7	120	89	22
		8	3535	7	158	89	28
315	322	1	2012	1	25	32	10,5
		2	2517	7	44	45	11,5
		3	3020	7	63	51	15,5
		4	3535	8	82	89	18
		5	3535	7	101	89	23,5
		6	3535	7	120	89	25,5
		8	3535	7	158	89	29

DP	DE	Gorges	Ref. Moyeu	Type	B	L	Masse Kg
355	362	2	3020	8	44	51	15
		3	3020	7	63	51	17,5
		4	3535	8	82	89	21
		5	3535	7	101	89	27
		6	3535	7	120	89	31
		8	3535	7	158	89	35
400	407	2	3020	4	44	51	11,5
		3	3535	4	63	89	17
		4	3535	4	82	89	22
		5	3535	5	101	89	25,5
		6	3535	7	120	89	28,5
		8	4040	7	158	102	45
450	457	2	3020	4	44	51	14
		3	3535	4	63	89	22
		4	3535	4	82	89	25,5
		5	3535	5	101	89	29
		6	4040	7	120	102	35
		8	4040		158	102	54
500	507	2	3020	4	44	51	15,5
		3	3535	4	63	89	24
		4	3535	4	82	89	28
		5	3535	5	101	89	32
		6	4040	7	120	102	38,5
		8	4040	5	158	102	55,5
560	567	3	3535	4	63	89	27
		4	3535	4	82	89	31
		5	4040	4	101	102	39
		6	4040	7	120	102	43
		8	4545	5	158	114	69
630	637	3	3535	4	63	89	31
		4	3535	4	82	89	36
		5	4040	4	101	102	44
		6	4040	7	120	102	61
		8	4545	5	158	114	78
710	717	3	3535	4	63	89	36
		4	3535	4	82	89	41
		5	4040	4	101	102	51
		6	4545	7	120	114	59
		8	4545	5	158	114	87
800	807	3	3535	4	63	89	38
		4	4040	4	82	102	48
		5	4040	4	101	102	56
		6	4545	7	120	114	66
		8	4545	5	158	114	100
1000	1007	3	4040	4	63	102	85
		4	4040	4	82	102	99
		5	4545	4	101	114	128
		6	4545	7	120	114	124
		8	5050	5	158	127	159
1250	1257	4	4545	4	82	114	139
		5	4545	4	101	114	168
		6	5050	7	120	127	186
		8	5050	5	158	127	223