




POULIES pour courroies type SPC/C - XPC/CX

Caractéristiques techniques / Dimensions (en mm)


Exemple de désignation :

5 SPC 315 (TL3535)

Nbre gorges - Section - Ø primitif - Moyeu


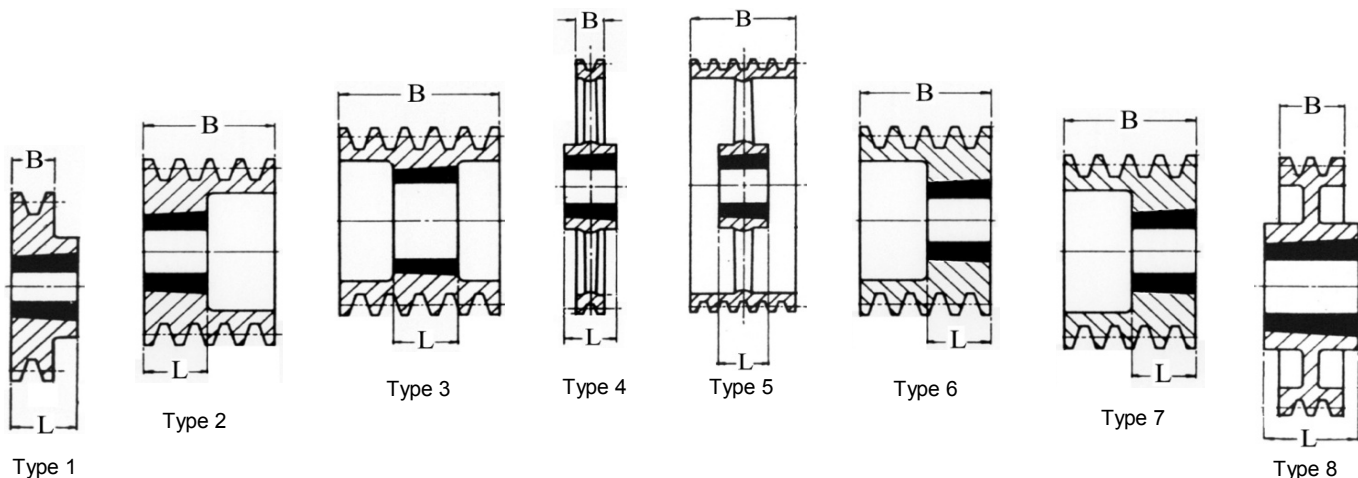


DP	DE	Gorges	Ref. Moyeu	Type	B	L	Masse Kg
200	107	3	2517	3	85	45	9
		4	3020	3	111	51	10,5
		5	3535	3	136	89	14
		6	3535	3	162	89	17
212	222	8	3535	3	213	89	23
		3	2517	3	85	45	10
		4	3020	3	111	51	12,5
		5	3535	3	136	89	15
224	234	6	3535	3	162	89	18
		8	3535	3	213	89	24
		3	3020	3	85	51	12,3
		4	3535	3	111	89	16,3
236	246	5	3535	3	136	89	18,4
		6	3535	3	162	89	20,4
		8	3535	3	213	89	24,5
		3	3020	3	85	51	13,9
250	260	4	3535	3	111	89	19
		5	3535	3	136	89	21,1
		6	3535	3	162	89	23,1
		8	3535	3	213	89	27,8
265	275	3	3020	3	85	51	13,1
		4	3535	3	111	89	22,4
		5	3535	3	136	89	24,5
		6	3535	3	162	89	26,7
280	290	8	3535	3	213	89	31,1
		3	3535	1	85	89	23,7
		4	3535	3	111	89	26,2
		5	3535	3	136	89	28,5
300	310	6	3535	3	162	89	31,3
		8	3535	3	213	89	36,2
		3	3535	1	85	89	20,1
		4	3535	7	111	89	22,7
315	325	5	3535	3	136	89	23,9
		6	3535	7	162	89	26,4
		8	3535	3	213	89	41
		3	3535	8	85	89	21,4
335	345	4	3535	7	111	89	24,3
		5	3535	7	136	89	27,3
		6	3535	6	162	89	30
		8	4040	3	213	102	48,5
355	365	3	3535	8	85	89	23
		4	3535	7	111	89	26
		5	3535	7	136	89	27
		6	3535	6	162	89	32
375	385	8	4040	3	213	102	54
		3	3535	8	85	89	23
		4	3535	7	111	89	26
		5	3535	7	136	89	27
400	410	6	3535	6	162	89	32
		8	4040	3	213	102	54
		3	3535	8	85	89	23
		4	3535	7	111	89	26

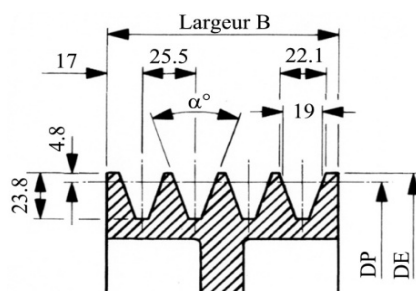

Gorges	3	4	5	6	8
B	85	111	136	162	213

α	DP
34	200 à 315
38	335 à 1250



DP	DE	Gorges	Ref. Moyeu	Type	B	L	Masse Kg
335	345	3	3535	8	85	89	25
		4	3535	7	111	89	28
		5	3535	7	136	89	31,5
		6	3535	6	162	89	35
355	365	8	4040	7	213	102	46,5
		3	3535	8	85	89	28
		4	3535	7	111	89	31
		5	3535	7	136	89	34
375	385	6	3535	6	162	89	37,5
		8	4040	7	213	102	49,5
		3	3535	8	85	89	30
		4	3535	7	111	89	33,5
400	410	5	3535	7	136	89	37
		6	4040	7	162	102	45,5
		8	4545	7	213	114	63
		3	3535	8	85	89	33

DP	DE	Gorges	Ref. Moyeu	Type	B	L	Masse Kg
425	435	3	3535	8	85	89	37
		4	3535	7	111	89	42
		5	4040	7	136	102	46,2
		6	4040	7	162	102	56
450	460	8	4545	7	213	114	68
		3	3535	4	85	89	34
		4	3535	5	111	89	39
		5	4040	5	136	102	49
500	510	6	4545	5	162	114	67
		8	5050	7	213	127	81
		3	3535	4	85	89	46
		4	3535	5	111	89	52
560	570	5	4040	5	136	102	59
		6	4545	5	162	114	68
		8	5050	7	213	127	96
		3	3535	4	85	89	52
630	640	4	4040	5	111	102	58
		5	4545	5	136	114	66
		6	5050	5	162	127	91
		8	5050	5	213	127	107
710	720	3	4040	4	85	102	56
		4	4545	4	111	114	65
		5	5050	5	136	127	90
		6	5050	5	162	127	101
800	810	8	5050	5	213	127	118
		3	4545	4	85	114	69
		4	5050	4	111	127	98
		5	5050	5	136	127	111
1000	1010	6	5050	5	162	127	128
		8	5050	5	213	127	148
		3	5050	4	85	127	110
		4	5050	4	111	127	128
1250	1260	5	5050	5	136	127	148
		6	5050	5	162	127	168
		8	5050	5	213	127	235
		3	5050	4	85	127	142