




POULIES pour courroies type SPZ/Z - XPZ/ZX

Caractéristiques techniques / Dimensions (en mm)


Exemple de désignation :

3 SPZ 160 (TL2012)

Nbre gorges - Section - Ø primitif - Moyeu


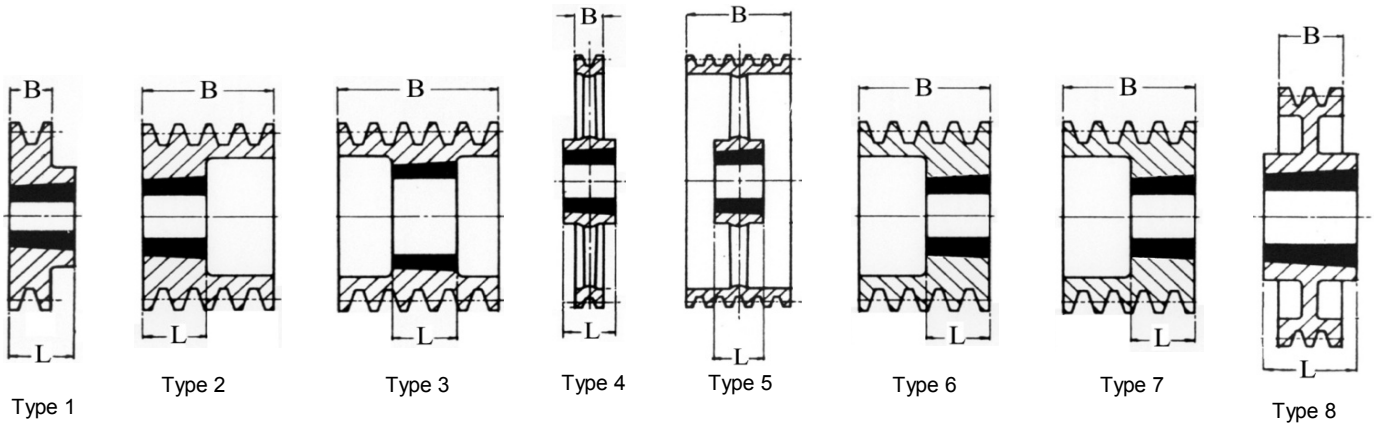


DP	DE	Gorges	Ref. Moyeu	Type	B	L	Masse Kg
63	67	1	1108	1	16	22	0,3
		2	1108	6	28	22	0,45
		3	1108	6	40	22	0,58
67	71	1	1108	1	16	22	0,35
		2	1108	6	28	22	0,41
		3	1108	6	40	22	0,56
71	75	1	1108	1	16	22	0,4
		2	1108	6	28	22	0,48
		3	1108	6	40	22	0,64
75	79	1	1108	1	16	22	0,4
		2	1210	6	28	25	0,46
		3	1210	6	40	25	0,62
80	84	1	1210	1	16	25	0,5
		2	1210	6	28	25	0,57
		3	1210	6	40	25	0,75
		4	1210	6	52	25	0,82
85	89	1	1210	1	16	25	0,6
		2	1610	6	28	25	0,54
		3	1610	6	40	25	0,74
		4	1610	6	52	25	0,97
		5	1610	6	64	25	1,22
90	94	1	1210	1	16	25	0,7
		2	1610	6	28	25	0,67
		3	1610	6	40	25	0,88
		4	1610	6	52	25	1,05
		5	1610	6	64	25	1,25
100	104	1	1210	1	16	25	0,8
		2	1610	6	28	25	0,94
		3	1610	6	40	25	1,2
		4	1610	6	52	25	1,4
		5	2012	6	64	32	1,55
106	110	1	1610	1	16	25	0,9
		2	1610	6	28	25	1,1
		3	1610	6	40	25	1,4
		4	1610	6	52	25	1,6
		5	2012	6	64	32	0,9
112	116	1	1610	1	16	25	1
		2	1610	6	28	25	1,3
		3	2012	6	40	32	1,4
		4	2012	6	52	32	1,7
		5	2012	6	64	32	1,87
118	122	1	1610	1	16	25	1,1
		2	1610	6	28	25	1,5
		3	2012	6	40	32	1,7
		4	2012	6	52	32	2
		5	2012	6	64	32	2

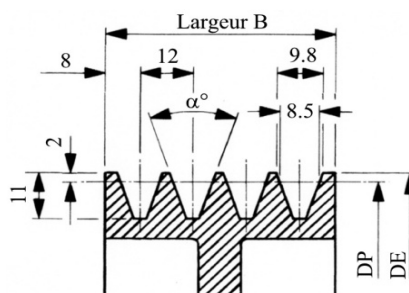

Gorges	1	2	1	4	5
B	16	28	40	52	64

α	DP
34	63 à 80
38	85 à 500



DP	DE	Gorges	Ref. Moyeu	Type	B	L	Masse Kg
125	129	1	1610	1	16	25	1,2
		2	1610	6	28	25	1,8
		3	2012	2	40	32	1,9
		4	2012	2	52	32	2,21
		5	2012	6	64	32	2,3
132	136	1	1610	1	16	25	1,4
		2	1610	6	28	25	2,1
		3	2012	2	40	32	2,3
		4	2012	2	52	32	2,7
		5	2517	6	64	45	2,85
140	144	1	1610	1	16	25	1,6
		2	1610	6	28	25	2,4
		3	2012	2	40	32	2,7
		4	2012	2	52	32	3,1
		5	2517	2	64	45	3,32
150	154	1	1610	1	16	25	1,9
		2	2012	1	28	32	2,6
		3	2012	2	40	32	3,3
		4	2517	2	52	45	3,8
		5	2517	2	64	45	4
160	164	1	1610	1	16	25	2,1
		2	2012	1	28	32	3,1
		3	2012	2	40	32	3,9
		4	2517	2	52	45	4,6
		5	2517	2	64	45	4,88

DP	DE	Gorges	Ref. Moyeu	Type	B	L	Masse Kg
180	184	1	1610	8	16	25	1,8
		2	2012	8	28	32	2,7
		3	2012	7	40	32	3,2
		4	2517	2	52	45	6,3
		5	2517	2	64	45	6,63
200	204	1	2012	8	16	32	2,5
		2	2012	8	28	32	3,1
		3	2012	7	40	32	3,7
		4	2517	7	52	45	5,4
		5	2517	3	64	45	8,72
224	228	1	2012	1	16	32	2,8
		2	2012	8	28	32	3,4
		3	2012	7	40	32	4,2
		4	2517	7	52	45	6,1
		5	2517	7	64	45	6,7
250	254	1	2012	1	16	32	3,3
		2	2012	4	28	32	3,9
		3	2012	5	40	32	4,8
		4	2517	7	52	45	6,8
		5	2517	7	64	45	7,82
280	284	1	2012	1	16	32	4,1
		2	2012	4	28	32	4,9
		3	2517	4	40	45	7,1
		4	2517	7	52	45	8,2
		5	2517	7	64	45	9,15
315	319	1	2012	1	16	32	4,59
		2	2012	4	28	32	5,8
		3	2517	4	40	45	7,5
		4	2517	5	52	45	9,3
		5	2517	5	64	45	10,4
355	359	1	2012	1	16	32	5,6
		2	2012	4	28	32	6,5
		3	2517	4	40	45	8,9
		4	2517	5	52	45	9,5
		5	2517	5	64	45	12,5
400	404	1	2012	1	16	32	6,69
		2	2517	4	28	45	8,8
		3	2517	4	40	45	10,5
		4	2517	5	52	45	11,5
		5	3020	5	64	51	14,5
450	454	1	2517	1	16	45	8,65
		2	2517	4	28	45	11,1
		3	2517	4	40	45	13,4
		4	3020	5	52	51	15,7
		5	3020	5	64	51	18,25
500	504	3	2517	4	40	45	16,8
		4	3020	4	52	51	19,07
		5	3030	5	64	76	22,5